


Floor Scale, Painted Mild Steel



Features:

- Heavy-duty industrial design
- Rugged diamond safety tread plate deck
- Rigid steel channel frame
- One IP67 Aluminium junction box J04EA
- Four high accuracy IP67 563YH (OIML MAA C4, Y=15 000 and NTEP 1:5 000 Class III, Multiple Cell) Shear beam
- Four AMF swivel feet
- 5mm thickness of top plate
- Corner error adjustment finished
- Threaded eyebolt holes for easy lifting (eyebolt included)
- Installed with level bubble

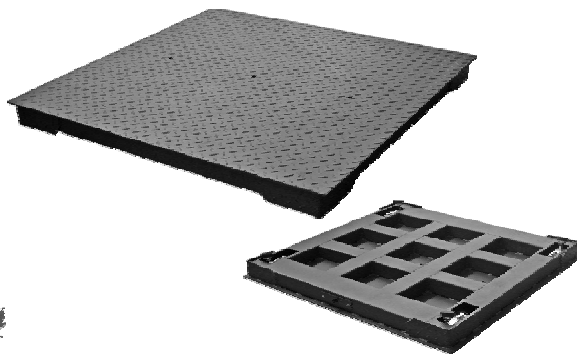

DIMENSIONS

PART NUMBER	RATED CAPACITY	LOAD CELL CAPACITY	SIZE IN INCHES (W x L x H)	WEIGHT
FSP3×3-500kg	500 kg	563YH-300kg	36" × 36" × 4"	74kg /163 lb
FSP3×3-1t	1t	563YH-500kg	36" × 36" × 4"	74kg /163 lb
FSP3×3-2.5t	2.5t	563YH-1t	36" × 36" × 4"	74kg /163 lb
FSP3×3-1Klb	1Klb	563YH-500lb	36" × 36" × 4"	74kg /163 lb
FSP3×3-2Klb	2Klb	563YH-1Klb	36" × 36" × 4"	74kg /163 lb
FSP3×3-5Klb	5Klb	563YH-2.5Klb	36" × 36" × 4"	74kg /163 lb
FSP4×4-500kg	500 kg	563YH-300kg	48" × 48" × 4"	120kg/265 lb
FSP4×4-1t	1t	563YH-500kg	48" × 48" × 4"	120kg/265 lb
FSP4×4-2.5t	2.5t	563YH-1t	48" × 48" × 4"	120kg/265 lb
FSP4×4-5t	5t	563YH-2t	48" × 48" × 4"	120kg/265 lb
FSP4×4-1Klb	1Klb	563YH-500lb	48" × 48" × 4"	120kg/265 lb
FSP4×4-2Klb	2Klb	563YH-1Klb	48" × 48" × 4"	120kg/265 lb
FSP4×4-5Klb	5Klb	563YH-2.5Klb	48" × 48" × 4"	120kg/265 lb
FSP4×4-10Klb	10Klb	563YH-4Klb	48" × 48" × 4"	120kg/265 lb
FSP5×5-2.5t	2.5t	563YH-1t	59" × 59" × 4"	162kg/357 lb
FSP5×5-5t	5t	563YH-2t	59" × 59" × 4"	162kg/357 lb
FSP5×5-5Klb	5Klb	563YH-2.5Klb	59" × 59" × 4"	162kg/357 lb
FSP5×5-10Klb	10Klb	563YH-SE5Klb	59" × 59" × 4"	162kg/357 lb
FSP4×6-2.5t	2.5t	563YH-1t	48" × 72" × 4"	-
FSP4×6-5t	5t	563YH-2t	48" × 72" × 4"	-
FSP4×6-5Klb	5Klb	563YH-2.5Klb	48" × 72" × 4"	-
FSP4×6-10Klb	10Klb	563YH-SE5Klb	48" × 72" × 4"	-
FSP5×7-2.5t	2.5t	563YH-1t	59" × 84" × 4"	-
FSP5×7-5t	5t	563YH-2t	59" × 84" × 4"	-
FSP5×7-5Klb	5Klb	563YH-2.5Klb	59" × 84" × 4"	-
FSP5×7-10Klb	10Klb	563YH-SE5Klb	59" × 84" × 4"	-

OPTIONAL ACCESSORIES

- Indicators (page 122)
- Ramps (page 137)
- Bumper Guards (page 138)

- Measurement Canada Approval for
 - 3' X3'-5Klb
 - 3' X4'-5Klb
 - 4' X4'-5Klb